



Outstanding Features

- ❖ **Multi-Channel Splitter/Combiner**
- ❖ **High Laser Power**
- ❖ **Computerized VOA**
- ❖ **Coupling between Fibers with Different NA and Diameter**

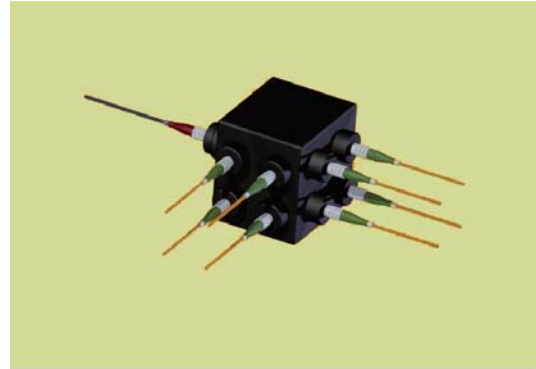

Specifications

Type	Single-mode or Multi-mode Free Space					
Port Configuration	1x4		1x12		1x32	
Overall Throughput	70%		70%		65%	
Uniformity	5%		8%		10%	
Operating Wavelength (nm)	400 ~ 1600					
Center Wavelength (nm)	400 ~ 1600					
Operating Temperature	-40° C ~ 85° C					
Fiber Diameter (µm)	9	50	62.5	100	200	400
Input/Output Fiber NA	0.11	0.22	0.39	0.48		
Input/Output Connection	Pigtails, Receptacles or Collimators					

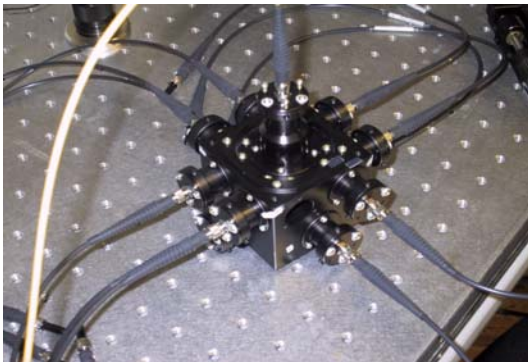

Applications

- ❖ **Medical Laser Therapy**
- ❖ **Fiber Optic Communication**
- ❖ **High Power White Laser**
- ❖ **Optical Fiber Sensors**